PG24 - SIMPLIFIED INSTALLATION

LM-AL-PG24-2M / C5 opal diffuser / 2 m profile

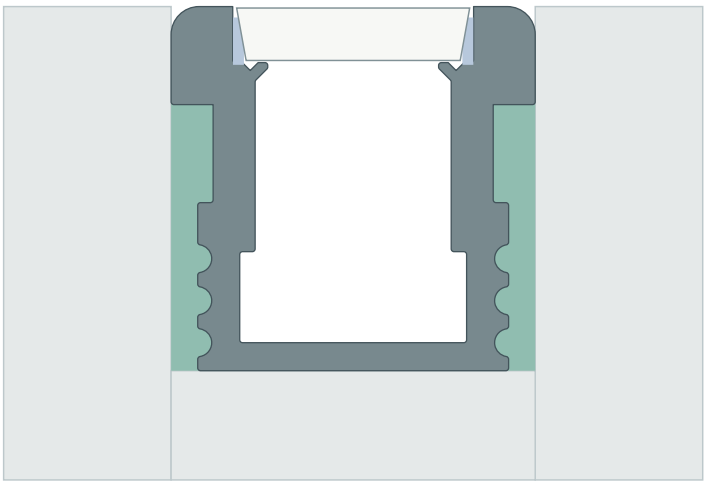

Silicone Adhesive

CHECK BEFORE CUTTING

HEIGHT	26 mm
INNER CHANNEL	16.2 mm
DIFFUSER	C5 opal

Use the actual profile to check the recess and finishing allowance. Plan cable entries and driver access before cutting. Disconnect power before fitting or servicing.

01 PREPARE THE RECESS

Dry-fit the profile, cover and end caps. Check the full section and substrate before applying adhesive. Cut and deburr the empty parts, remove swarf and protect the cable route.

02 BED THE BODY

Use a compatible adhesive suited to the profile, substrate and intended location. Keep the profile straight and observe the adhesive curing instructions.

03 FIT LED AND END CAPS

Clean and dry the channel. Fit the selected strip and matching end caps. Seal caps and cable entries as required by the specified complete assembly.

04 FIT C5 AND TEST

Use suitable silicone at the C5 cover interface as shown. Fit the cover evenly and follow the sealant curing instructions. Inspect the seals and test to the LED system instructions.

CONFIRM THE COMPLETE ASSEMBLY

For moisture-exposed or walked-over use, confirm the assembly specification with Lumeno before ordering. No IP or load rating is assigned here. For best results, order tailored and pre-wired cuts from Lumeno.