

- New Slim Design with DOB DMX
- X-PE LED as light source
- 10° - 60° Beam Angle Available
- Perfect solution for colour washing of building façade
- Long Lifespan of over 50K hours - L70 Tested
- Superb Light performance with full colour spectrum
- High grade fixed focal lenses with reflection cups
- 3D Heat-sink for better temperature control
- IP65 Water resistance for outdoor use
- Build In DMX Decoders with pre-defined address
- RGB 24V




## RGB SPOT LIGHTS - PYXI Series

DMX RGB High Power Spot Lights for Architectural Lighting

LUMENO PYXI Series RGB Wall Washers are a focused light, spot luminaries, designed for external façade of buildings or monuments. PYXI series are build with high grade aluminium alloy body with weather resistant power coating for long life in harsh conditions. With XPE High power leds as lights source and quality lens & reflector cups, PYXI series provide state of the art external illumination. All models come with a build in DMX decoders to reduce number of external exposed controllers as well as labour and maintenance. Easy installation, and configuration using simplified DMX controllers available from Lumeno range. Now available in upgraded slim version V2.

### Structural Details :

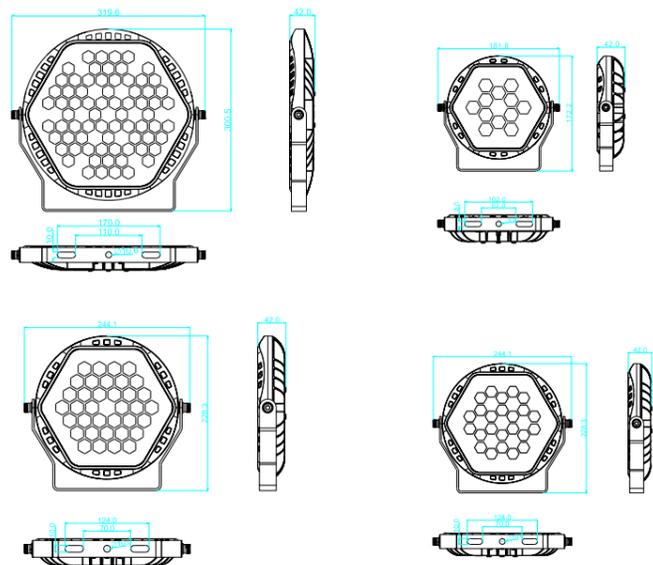

### Ordering Codes :

Model number	Power	LED's	Power Supply	Control Method	Wiring	IP Rating
LM-PY121SL	12W	12x 1W XPE	24V DC	DMX 512 Built-in	5 wire system (D+/-/G/V+/-)	IP65
LM-PY241SL	24W	24x 1W XPE				
LM-PY361SL	36W	36x 1W XPE				
LM-PY721SL	72W	72x 1W XPE				



<b>Voltage</b>	24V DC
<b>Light Source</b>	1W X-PE LED
<b>Projection Distance</b>	20-30m
<b>Control System</b>	Built-in DMX 512
<b>Wiring/Connections</b>	5 Wire System
<b>Beam angle</b>	30°
<b>IP Rating</b>	IP65
<b>Working Temperature</b>	-25°C ~ +60°C
<b>Front Cover</b>	Shatter-proof glass
<b>Body finish</b>	Powder coated black, corrosion resistant
<b>Body Material</b>	Aluminium die-cast
<b>Warranty</b>	3 Years


# PYXI

WALL WASHER SERIES BY: LUMENO



## Modern and stylish luminaire

High quality finish with a moder twist

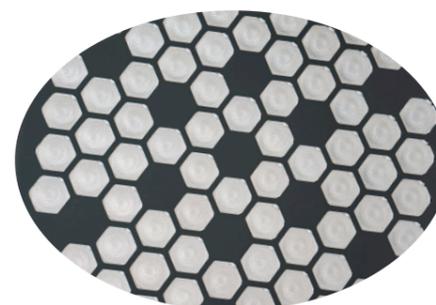

## Individual reflexion cups & lenses

Uniform light beam and smooth colour mixing



## Loop through connection

Lights are connected in series using IP65 plugs supplied



### Controllers & Accessories

LM-CTRXC-DMX-DR	Din Rail Mounted DMX Master - PRO
LM-CTI4T-DMX-RGB	DMX Master Wall plate, with RF interface
LM-CTR94-RGBW	RF Remote, CTRX4 compatible, 4 ZONE, RGBW
LM-AMP2100DMX	DMX Amplifier for extending DMX Universe range
LM-PS24V100WP-SL	100W LED Power Supply
LM-PS24V150WP-SL	150W LED Power Supply
LM-PS24V200WP-SL	200W LED Power Supply,

Maximum 30 lights can be controlled via single DMX master without DMX amplifier.